




HD

IP Intercom Doorphone

IS/IV740

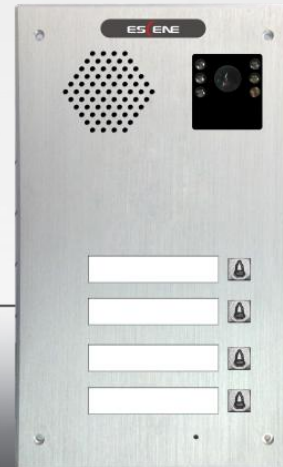

ESCENE IP Intercom doorphone IS/IV740 is the newest indoor VoIP IP doorphone which professional designed as the requirements from industry users. The device has the characteristic of well compatibility with different platform, offering users a convenient service.

IS/IV740 is dust proof, water proof and dismantle prevention, having a fashion appearance and high protection. IS/IV740 is a bond of door opening by long-distance DTMF, Password. Its powerful performance, stability and reasonable price make it a perfect choice of industry user.

Key Features

- Support embedded or wall-mounted installation.
- High-fidelity sound quality, HD codec, Full duplex hands-free calls;
- 2*RJ45 standard Ethernet Ports, integrated PoE;
- Built-in speaker and high sensitive microphone, support hand-free calls and receive emergency broadcast
- User-defined DSS keys, which can be set up to Speedy dial, intercom, etc.
- Support Plug-and-Play, auto-provision, remote maintenance and management;



IS740-01

IS740-02

IS740-04

IV740-01

IV740-02

IV740-04

NOTE: IS/IV is Intercom Series & Intercom Video Series, , 01 is DSS key, Camera is available in video model.

IS/IV740 Technical Datasheet

Phone Features

WEB support Multi-Language
4 SIP account, Hotline
Call hold, Call waiting, Call forward
Call transfer (blind/busy/ask)
Mute, DND(Active URL)
Auto-answer, 3-way conferencing
4 DSS programmable key(Speed dial, Intercom etc.)
Volume control
Direct IP call without SIP proxy
Default Ring tone 1 selection/import/delete
Custom Warning Ring tone 2
selection/import/delete
Time setting(SNTP/SIP Server/Manual)
Support SIP main/standby server

Advanced Features

1 key to restore the factory value
4 DSS programmable key(Speed dial, Intercom etc.)
2 Logical input and 2 Relay output interface, can
connect other security equipment

IP PBX System Integration

Busy lamp field (BLF), BLF list
Bridged line appearance (BLA)
DND & Forward synchronization
Intercom, Paging, Music on hold
Call pickup, Dial Plan, Call recording Anonymous
call, Anonymous call rejection

Video

Video codec: H.264
Image codec: JPEG/PNG/BMP/GIF
Video format: MP4/3GP/FLV
Video call resolution: QCIF / CIF / VGA / 4CIF
(1280x720P)
Bandwidth selection: 64kbps~4Mbps
Frame rate selection: 10~30fps

Compatible with the platform



Codes and Voice Features

Wideband Codec: G.722
Narrowband codec: G.711μ/A, G.723.1
G.726, G.729AB,iLBC
VAD, CNG, AEC, AGC, Full-duplex,

Security

VLAN QoS (802.1pq)
Phone lock for personal privacy protection
Admin/User 2-level configuration mode , LLDP, CDP
L2TP VPN tunneling protocol – added

Network Features

SIP v1 (RFC2543), v2 (RFC3261)
SIP connection: Proxy mode & Peering Points mode;
DNS SRV (RFC3263);
Redundant server support
NAT Traversal: STUN mode
DTMF: In-Band, RFC2833, SIP Info, Auto
HTTP/HTTPS Web Management
IP Assignment: Static/DHCP/PPPoE
Bridge/Router mode for PC port
TFTP/DHCP/PPPoE client
DNS client, NAT/DHCP server
Layer 3 ToS, DSCP

Management

Auto-provision via FTP/TFTP/HTTP/HTTPS
Configuration: browser/phone/auto-provision
Trace package and system log export

Physical Features

4 DSS programmable key(Speed dial, Intercom etc.)
4 LED lights,
1 light touch button(Remote factory value)
2xRJ45 10/100M Ethernet ports
Power adapter: AC 100~240V input and
DC 12V/1A output
Power over Ethernet ,IEEE 802.3af,class 0
Net weight:
Gross weight:
Dimension:
Operating humidity: 10~95%
Storage temperature: up to 60°C

Package Features

Qty/CTN:
N.W/CTN:
G.W/CTN:
Carton Meas:

Certifications



ES CENE

Communication starts from **SayHi™**

ESCENE COMMUNICATION CO.,LTD

Add: Floor 4 building C YueAn Industrial Park No.51 Huangcun Road Tianhe District,Guangzhou,China.

Tel: (86)20-82320720 Fax: (86)20-82326757