


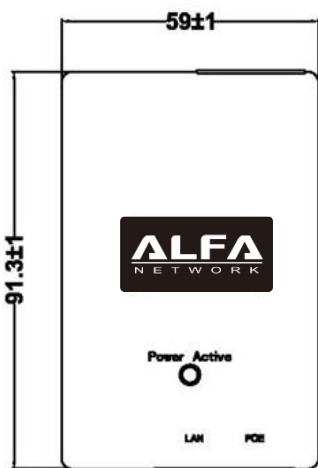


APoE48V-1G


48V Gigabit PoE Adapter




Available AC Power Code:




USA version




EU version



Brazil version



AU version



UK version



India version

RJ45 Output(Data & Power)		
Pin	Power	Data
1	+ Vdc	Transmit Data +
2	+ Vdc	Transmit Data -
3	- Vdc	Receive Data +
4	+ Vdc	Bi-directional Data +
5	+ Vdc	Bi-directional Data -
6	- Vdc	Receive Data -
7	- Vdc	Bi-directional Data +
8	- Vdc	Bi-directional Data -

APoE48V-1G

48V Gigabit PoE Adapter

Specification:

Model	APoE48V-1G
Output Voltage	48V
Output Current	500mA
Input Voltage	90~264Vac Maximum
Input Frequency	47~63Hz
Input Current	0.55A Maximum
Inrush Current	30A Maximum
Ripple	480mV Maximum
Hold-Up Time	10ms
Over Current Protection	Auto Recovery
MTBF	50,000H(at 25°C)
Short-circuit Protection	Auto Recovery
Operating Temperature	0~40°C
Storage Temperature	-20~+85°C
Relative Humidity	5%-90%
Safety	CE / FCC / UL / GS

For further details:

Alfa Network Inc.,

4F-1 No. 106, Rueiguang Rd., Neihu District, Taipei City, Taiwan.

<http://www.alfa.com.tw> | sales@alfa.com.tw

Tel:+886-2-27968477 | Fax:+886-2-27968478

Copyright 2009 Alfa Networks Inc. All Rights Reserved

Changes to specifications and descriptions may change at any time without prior notice